

03 Co



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

.....

Group Art Unit: Unknown

Examiner: Unknown

For: Expander

CERTIFICATE OF MAILING
37 CFR 1.8


I hereby certify that this correspondence is being deposited on 14 June 2002 with the United States Postal Service as First Class Mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

14 June 2002 C. E. B. Patton
Date Signature


CLAIM TO PRIORITY

United Kingdom Application Serial Number 0028041.2 filed November 17, 2000.

Respectfully submitted,


William B. Patterson
Registration No. 34,102
MOSER, PATTERSON & SHERIDAN, L.L.P.
3040 Post Oak Blvd., Suite 1500
Houston, TX 77056
Telephone: (713) 623-4844
Facsimile: (713) 623-4846
Attorney for Applicant

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

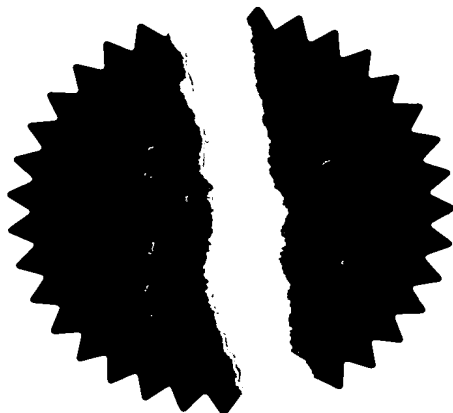


Signed

Andrew Gersey

Dated 26 November 2001

02/11/2009



2.1

THIS PAGE BLANK (USPTO)

SEARCHED INDEXED
SERIALIZED FILED
MAR 10 2009
FBI - NEW YORK

100-43

SEARCHED
SERIALIZED

INDEXED
FILED
MAR 10 2009
FBI - NEW YORK


SEARCHED
SERIALIZED
INDEXED
FILED
MAR 10 2009
FBI - NEW YORK

SEARCHED
SERIALIZED
INDEXED
FILED
MAR 10 2009
FBI - NEW YORK

SEARCHED
SERIALIZED
INDEXED
FILED
MAR 10 2009
FBI - NEW YORK



17NOV00 E384512-3 000289 0.00-0028041.2

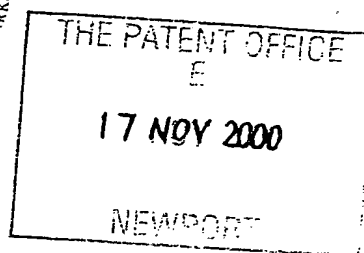

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

17 NOV 2000

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

AS\AM\P11058GB

2. Patent application number

(The Patent Office will fill in this part)

0028041.2

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

WEATHERFORD/LAMB, INC.
C/O CSC, THE UNITED STATES CORPORATION COMPANY
1013 CENTRE ROAD
WILMINGTON
DELAWARE 19805
UNITED STATES OF AMERICA
05023517001
DELAWARE, UNITED STATES OF AMERICA

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

EXPANDER

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

CRUIKSHANK & FAIRWEATHER
19 ROYAL EXCHANGE SQUARE
GLASGOW
G1 3AE
SCOTLAND
UNITED KINGDOM

Patents ADP number (*if you know it*)

547002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country	Priority application number (<i>if you know it</i>)	Date of filing (<i>day / month / year</i>)
---------	--	---

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (<i>day / month / year</i>)
-------------------------------	---

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

9

Claim(s)

4

Abstract

1

Drawing(s)

9

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

CRUIKSHANK & FAIRWEATHER

16 NOVEMBER 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

ANDREW SHANKS
0141 221 5767

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

1

EXPANDER

This invention relates to an expander primarily intended for use in expanding tubing downhole.

It has been proposed to use a roller expander to expand slotted and solid tubing in drilled bores, and in particular in oil and gas wells, such as described in, for example, WO 00/37767, WO 00/37768 and WO 00/37771. A typical roller expander comprises a body carrying a number of radially movable rollers. The rollers may be mounted on pistons or cones such that elevated internal fluid pressure or axial force may be applied to the expander to urge the rollers radially outwardly into contact with a surrounding expandable tube. By simultaneously rotating and advancing the expander a length of tubing may be expanded from a first diameter to a larger second diameter.

It is among the objectives of embodiments of the present invention to provide an improved roller expander for use in such applications.

According to a first aspect of the present invention there is provided a tubing expander comprising a body carrying at least one radially movable expansion member and a sleeve mounted about the body and being radially supported by the expansion member.

The invention also relates to a method of expanding tubing comprising the steps:

providing a tubing expander comprising a body carrying

at least one radially movable expansion member and a sleeve mounted about the body and being radially supported by the expansion member;

locating the expander in a tubing section of a first diameter;

radially extending the expansion member to urge a portion of the sleeve into contact with an internal surface of the tubing section; and

rotating the expander such that the sleeve is rolled around the internal surface of the tubing section and expands the tubing section to a larger second diameter.

The invention has particular application in expansion of slotted expandable tubing, in which an unexpanded tubing section features a plurality of overlapping axial slots. Expansion of the tubing is accommodated, at least in part, by bending of the fingers or webs of material between the slots, such that in the expanded tubing the slots assumed a diamond shape. With conventional roller expanders, featuring generally cylindrical rollers or balls mounted around an expander body, the relatively small diameter rollers or balls tend to drop into the slots; that is as the expander rotates and a ball encounters a slot, the ball will be pushed outwardly into the slot and must then be pushed inwardly out of the slot, against the ball actuating force, to allow the ball to move past the slot. The circumference of a typical slotted tube may feature nine slots, and when an expander is being rotated within such a pipe at, for example, 250 rpm, the expander and string will

experience a degree of vibration. However, in the present invention the sleeve has a relatively large diameter, such that the sleeve will not drop into the slots to the same extent; the sleeve will tend to bridge the slots, such that the rotating expander experiences less vibration and requires a lower torque to rotate the expander. Of course the expander may be utilised to expand other forms of tubing, including but not limited to solid-walled tubulars, tubulars with other slot patterns, tubulars with holes of a variety of sizes and patterns, tubulars with purposely machined or cast "defects", such as zones of thinned wall, and tubulars which have been longitudinally folded or corrugated into various forms.

Although reference is made above to a tubing section of a first diameter, the invention is not limited to use in tubulars which are initially cylindrical, and as noted above may be utilised in one or both of the unfolding and radial expansion of tubulars which have been longitudinally folded or corrugated into various forms. Further, the invention may be used independently or in combination with other unfolding or expansion tools, devices or mechanisms.

The portion of the tubing section subject to deformation may be relatively short, for example to create a patch or straddle, or to create a hanger or a seal. Alternatively, the tubing section may be of considerable length.

Preferably, the expander comprises a plurality of radially movable expansion members and associated sleeves.

In a preferred embodiment, four sets of expansion members and sleeves are provided. Adjacent expansion members are preferably circumferentially offset. In a preferred embodiment, a first set of two adjacent expansion members are mutually offset by 180° , and a second set of two members are mutually offset by 180° and the first and second sets are offset by 90° . Conveniently, the leading sleeve features a tapered leading end, and may be relatively long. The other sleeves may also feature tapered leading ends. The diameter of the sleeves may increase from the leading end of the expander. Of course particular applications of the expander may require or benefit from the provision of particular numbers of sets of sleeves and members, particular sleeve configurations, and particular expansion member offsets.

The sleeve axis may be adapted to remain parallel to the axis of the tubing section as the sleeve rotates. In such an arrangement it is necessary to apply an external axial force to move the expander axially through the tubing section. Alternatively, the sleeve axis may be skewed relative to the axis of the tubing section, in which case the rotating sleeve, in contact with the tubing section, will act in a similar manner to a screw thread and thus induce an axial force on the expander, minimising or obviating the requirement to apply an axial force to advance the expander. The outer surface of the sleeve may define a contact surface, such as a helical profile or screw thread, to facilitate creation and transfer of axial

force.

Preferably, the expansion members comprise pistons mounted in corresponding blind recesses in the expander body. The recesses may communicate with an axial fluid passage in the body. Conveniently, the recesses are cylinders, facilitating cutting of the cylinders in the body. Most preferably, the expansion members further comprise rollers mounted on piston-mounted axles. Preferably, the axles extend axially of the expander body.

Preferably, the body defines a leading end dimensioned to be a snug fit in the tubing section to be expanded, to stabilise the expander in the tubing.

These and other aspects of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of a tubing expander in accordance with a preferred embodiment of the present invention;

Figure 2 is a side view of the expander of Figure 1;

Figure 3 is an enlarged sectional view on line 3 - 3 of Figure 2;

Figure 4 is a sectional view of the expander of Figure 1;

Figure 5 is a perspective view of the expander of Figure 1, shown in the actuated configuration;

Figure 6 is a side view of the actuated expander of Figure 5;

Figure 7 is an end view of the actuated expander of

Figure 5;

Figure 8 is a sectional view on line 8 - 8 of Figure 6; and

Figure 9 is a sectional view of the expander of Figure 5.

Figures 1 to 4 of the drawings illustrates a tubing expander 10 in accordance with a preferred embodiment of the present invention, shown in a retracted configuration. Figures 5 to 9 of the drawings illustrate the expander 10 in an actuated or extended configuration. The expander 10 comprises an elongate body 12 adapted for mounting on the end of an appropriate tubular running string (not shown). The leading end of the body carries a rounded nose 14 which is dimensioned to be a snug fit in a tubing section 11 which the expander 10 will be utilised to expand.

Mounted around the expander body 12 are four cylindrical sleeves 16. The sleeves 16 are spaced apart and are located on the body 12 by thrust collars 18 releasably secured to the body 12 by appropriate threaded pins 20. Each sleeve 16 defines an internal circumferential channel 22 (Figures 4 and 9) which cooperates with a respective piston-mounted roller 24. Each roller 24 is mounted on an axle 26 pinned to an outer end of a respective piston 28, each piston being radially movable in a blind cylinder 30 formed in the body 12. Each cylinder 30 intersects an axial fluid passage 32 which extends through the expander body 12. Thus, an increase of fluid pressure within the passage 32 tends to urge the

pistons 28, and thus the rollers 24, radially outwardly. The maximum radial travel of each piston 28 is determined by a pair of plates 34 pinned to the body 12 and which are adapted to engage a step 36 defined on the piston 28.

5 Radial extension of a piston 28 carries the respective sleeve 16 to a position in which the sleeve axis is offset from the body axis, as is perhaps best illustrated in Figure 8. The body 12 is profiled to permit such movement of the sleeves 16, the opposite face of the body 36 at each
10 piston defining an arc of diameter corresponding to that of the sleeve 16. This movement and offsetting of the sleeves 16 results in the actuated expander 10 describing a significantly greater diameter than the retracted expander, and thus a diameter greater than the individual sleeves
15 themselves.

 The leading sleeve 16a is relatively long in comparison to the other sleeves 16b-d, and also features a tapering leading end 38 to facilitate the initial expansion of a tubing section 11 from an inner diameter corresponding
20 to the outer diameter of the expander nose 14.

 In use, the expander 10 is mounted on the end of a running string, together with a motor, and run into a bore. The expander 10 may be run into the bore together with a section of tubing to be expanded, or may be run into tubing
25 section already located within a bore. The expander 10 has particular application in expanding axially slotted tubing, such as sold under the EST trade mark by the applicant, and as featured in a range of other expandable products

supplied by the applicants, such as the sandscreens sold under the ESS trade mark. On reaching the location in the bore where the tubing is to be expanded, at least the tubing nose 14 is located in the upper or trailing end of the tubing 11. The fluid pressure within the passage 32 is then increased to extend the pistons 28, and to urge the sleeves 16 towards the fully extended positions as shown in Figures 5 to 9. The expander 10 is then rotated and advanced axially into the tubing 11. The sleeves 16 are urged into contact with the internal surface of the tubing 11 and expand the tubing to a larger second diameter. The presence of four mutually offset sleeves 16 (the leading pistons and rollers are arranged to offset the extended sleeve 16a, 16b by 180°, the trailing sleeves 16c, 16d are similarly mutually offset, and the leading and trailing sleeve sets 16a, 16b and 16c, 16d are offset by 90°/270°) serves to stabilise the expander 10 in the tubing and provides for a progressive expansion of the tubing.

As will be apparent to those of skill in the art, the relatively large diameter of the sleeves 16 results in the sleeves 16 bridging the slots in the tubing 11, even as the circumferential extent of the slots increases as the tubing is expanded. This reduces the vibration experienced by the rotating expander 10, and also reduces the torque necessary to rotate the expander 10.

It will further be apparent to those of skill in the art that the above described embodiment is merely exemplary of the present invention, and that various modifications

and improvements may be made thereto without departing from the scope of the invention. For example, the expander may be mounted on any appropriate support, such as coil tubing, in combination with a downhole motor for rotating the expander, or a string of drill pipe, allowing the expander to be rotated from surface. Further, while the present invention has particular application in expanding slotted tubing downhole, the expander may be used in the expansion of other tubing forms, and in other situations..

CLAIMS

1. A tubing expander comprising a body carrying at least one radially movable expansion member and a sleeve mounted about the body and being radially supported by the expansion member.
5
2. The expander of claim 1, in combination with a section of expandable tubing.
3. The expander of claim 1, in combination with a section of expandable tubing which defines a plurality of openings before or following expansion.
10
4. The expander of claim 2 or 3, wherein the body defines a leading end dimensioned to be a snug fit in the tubing section.
5. The expander of claim 1, 2, 3 or 4, wherein the expander comprises a plurality of radially movable expansion members and associated sleeves.
15
6. The expander of claim 5, wherein four sets of expansion members and sleeves are provided.

7. The expander of claim 5 or 6, wherein adjacent expansion members are circumferentially offset.

5 8. The expander of claim 7, wherein a first set of two adjacent expansion members are mutually offset by 180° , and a second set of two members are mutually offset by 180° and the first and second sets are offset by 90° .

9. The expander of any of claims 5 to 8, wherein at least one of the sleeves has a tapered leading end.

10 10. The expander of any of claims 5 to 9, comprising a leading sleeve having a tapered leading end.

11. The expander of any of claims 5 to 10, comprising a leading sleeve which is longer than the other sleeves.

15 12. The expander of any of claims 5 to 11, wherein the sleeves increase in diameter from the leading end of the expander.

13. The expander of any of the preceding claims, wherein the expansion member comprises a piston mounted in a corresponding recess in the expander body.

20 14. The expander of claim 13, wherein the recess communicates with an axial fluid passage in the body.

15. The expander of claim 13 or 14, wherein the recess is substantially cylindrical.

16. The expander of any of the preceding claims, wherein the expansion member comprises a roller for engaging an inner face of the sleeve.

17. The expander of claim 16, wherein the roller is mounted on an axle extending axially of the expander body.

18. The expander of any of the preceding claims, wherein the sleeve axis is adapted to remain parallel to the axis of a tubing section as the sleeve rotates therein.

19. The expander of any of claims 1 to 17, wherein the sleeve axis is adapted to be skewed relative to the axis of a tubing section as the sleeve rotates therein, whereby rotation of the sleeve, in contact with a tubing section, induces an axial force on the expander.

20. The expander of any of the preceding claims, wherein the outer surface of the sleeve defines a contact surface adapted to facilitate creation and transfer of axial force between the sleeve and a tubing section as the sleeve rotates therein.

21. A method of expanding tubing comprising the steps:
providing a tubing expander comprising a body carrying

at least one radially movable expansion member and a sleeve mounted about the body and being radially supported by the expansion member;

5 locating the expander in a tubing section of a first diameter;

radially extending the expansion member to urge a portion of the sleeve into contact with an internal surface of the tubing section; and

10 rotating the expander such that the sleeve is rolled around the internal surface of the tubing section and expands the tubing section to a larger second diameter.

22. The method of claim 21, wherein the tubing section is expanded downhole.

15 23. The method of claim 21 or 22, wherein the tubing section is slotted expandable tubing and expansion of the tubing enlarges the slots.

24. The method of claim 21, 22 or 23, wherein the expansion member is actuated by fluid pressure.

20 25. The method of claim 21, 22, 23 or 24, wherein the tubing section is stabilised on the expander by locating a leading end of the stabiliser in the unexpanded tubing section.

TUBING EXPANDERABSTRACT

A tubing expander (10) comprises a body (12) carrying a plurality of radially movable piston-mounted rollers (24) and associated sleeves (16) mounted about the body (12) and being radially supported by the rollers (12). The expander (10) is positioned in a length of tubing of a first diameter, the pistons (28) extended, and the expander (10) rotated such that the sleeves (16) roll around the inner surface of the tubing and expand the tubing to a larger second diameter.

THIS PAGE BLANK (USPTO)

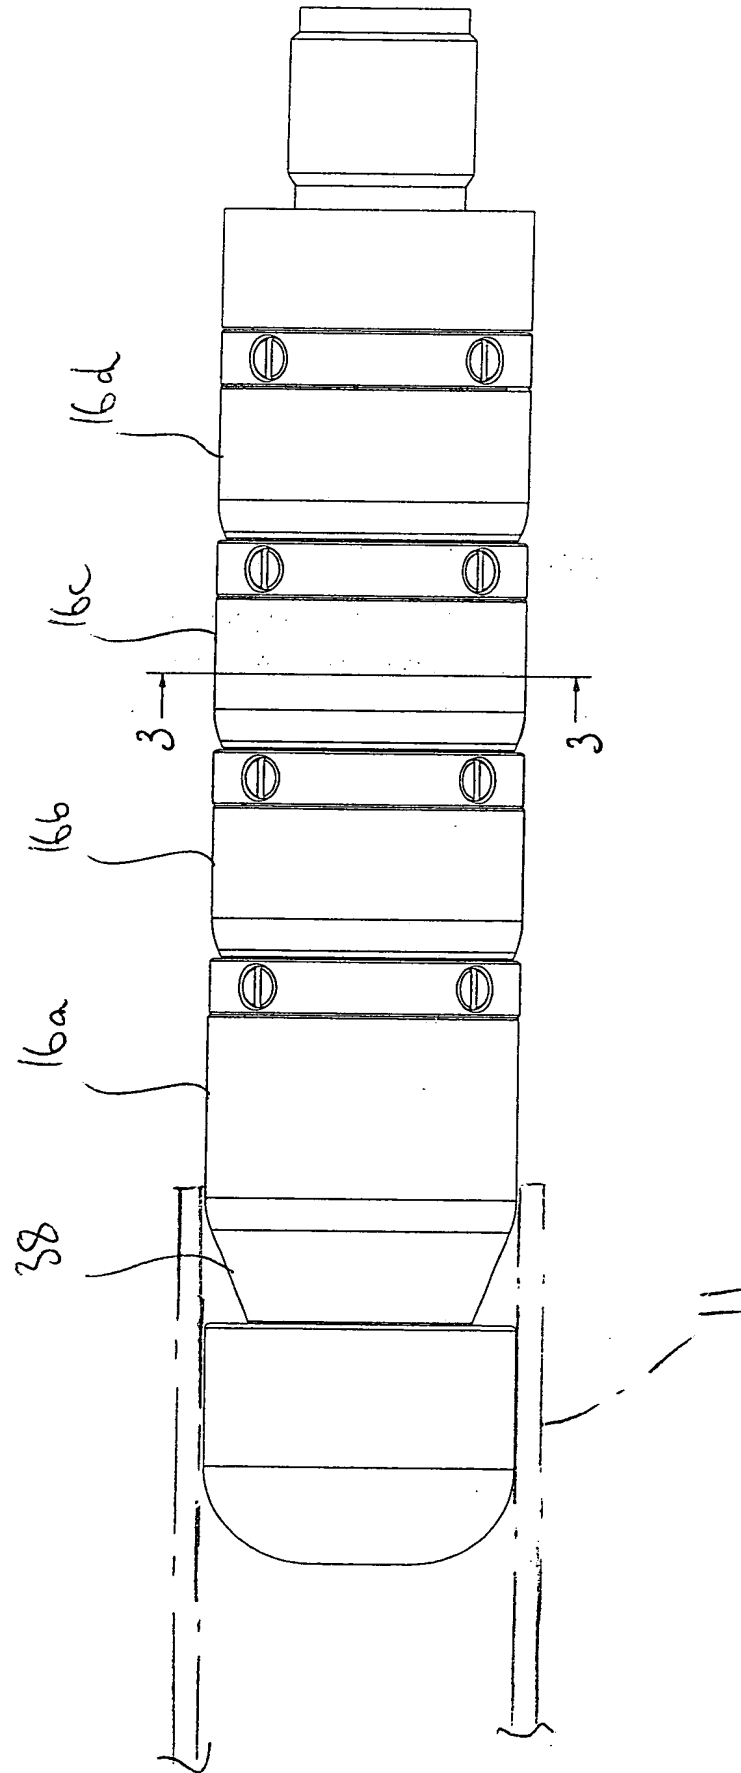


Figure 2

THIS PAGE BLANK (USPTO)

3/9

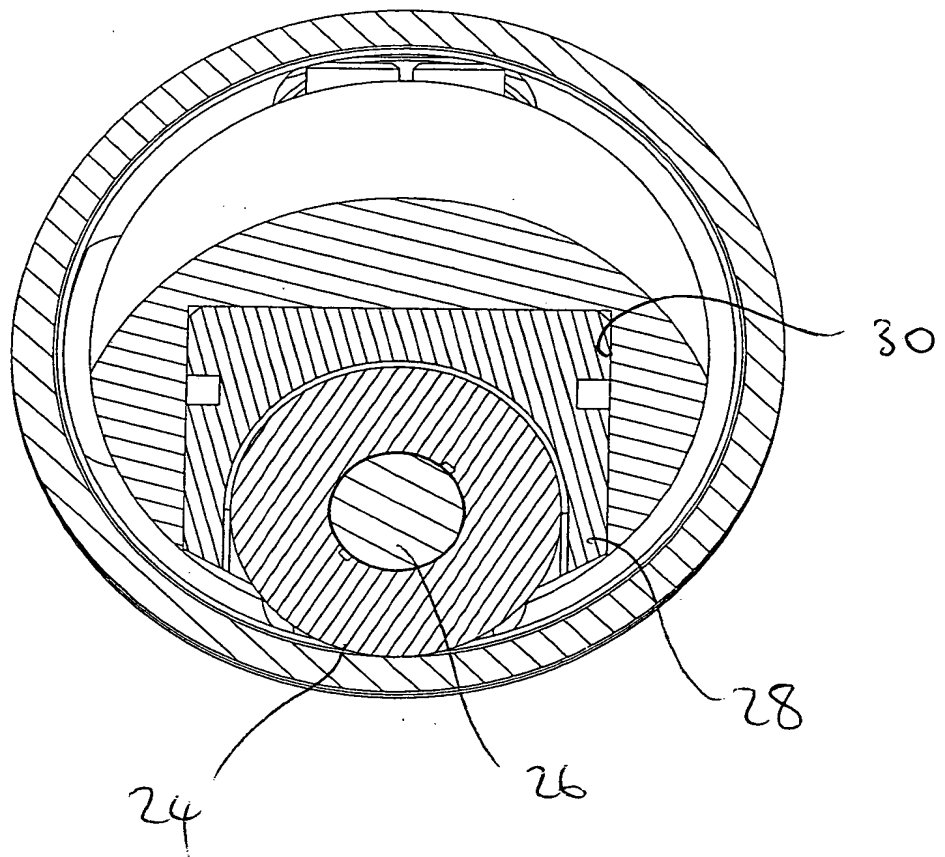


figure 3

THIS PAGE BLANK (USPTO)

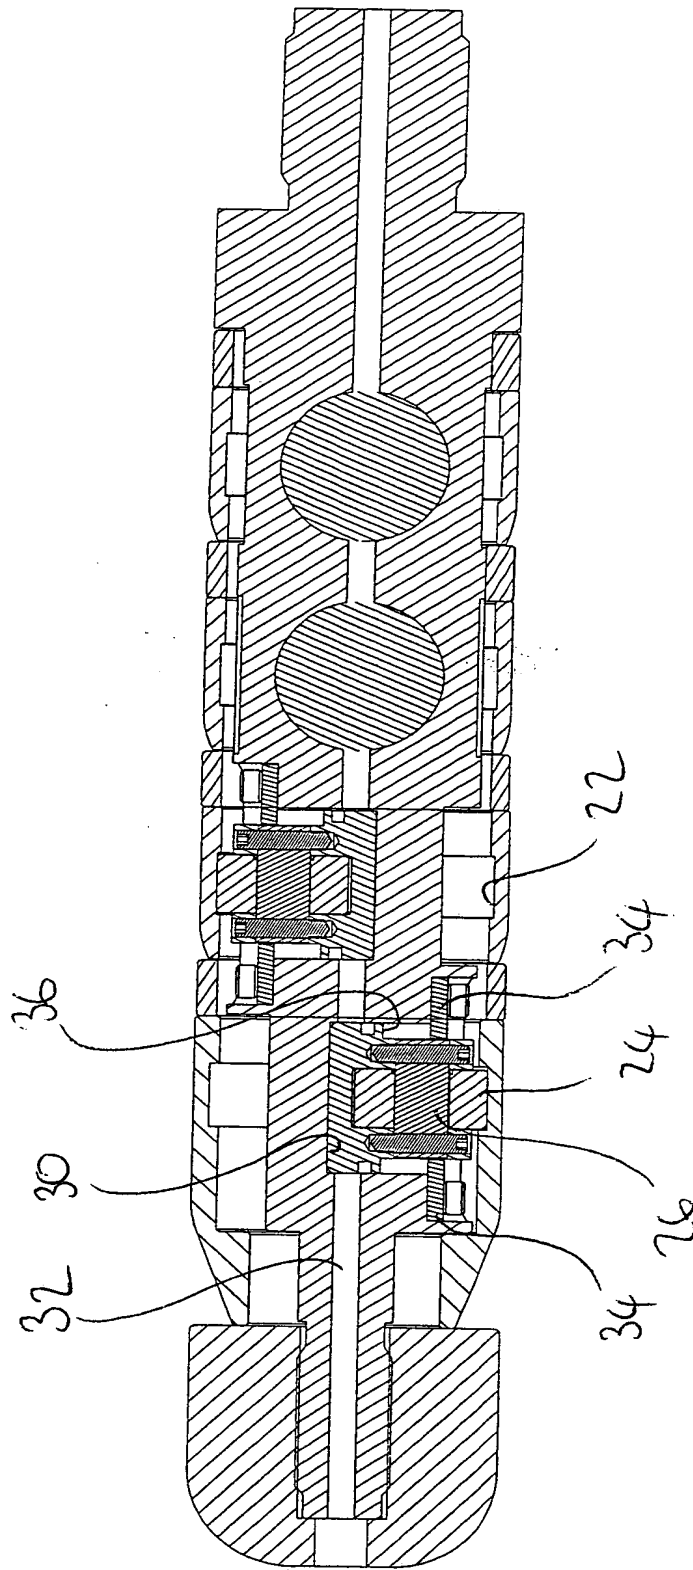


Figure 4

THIS PAGE BLANK (USPTO)

5/9

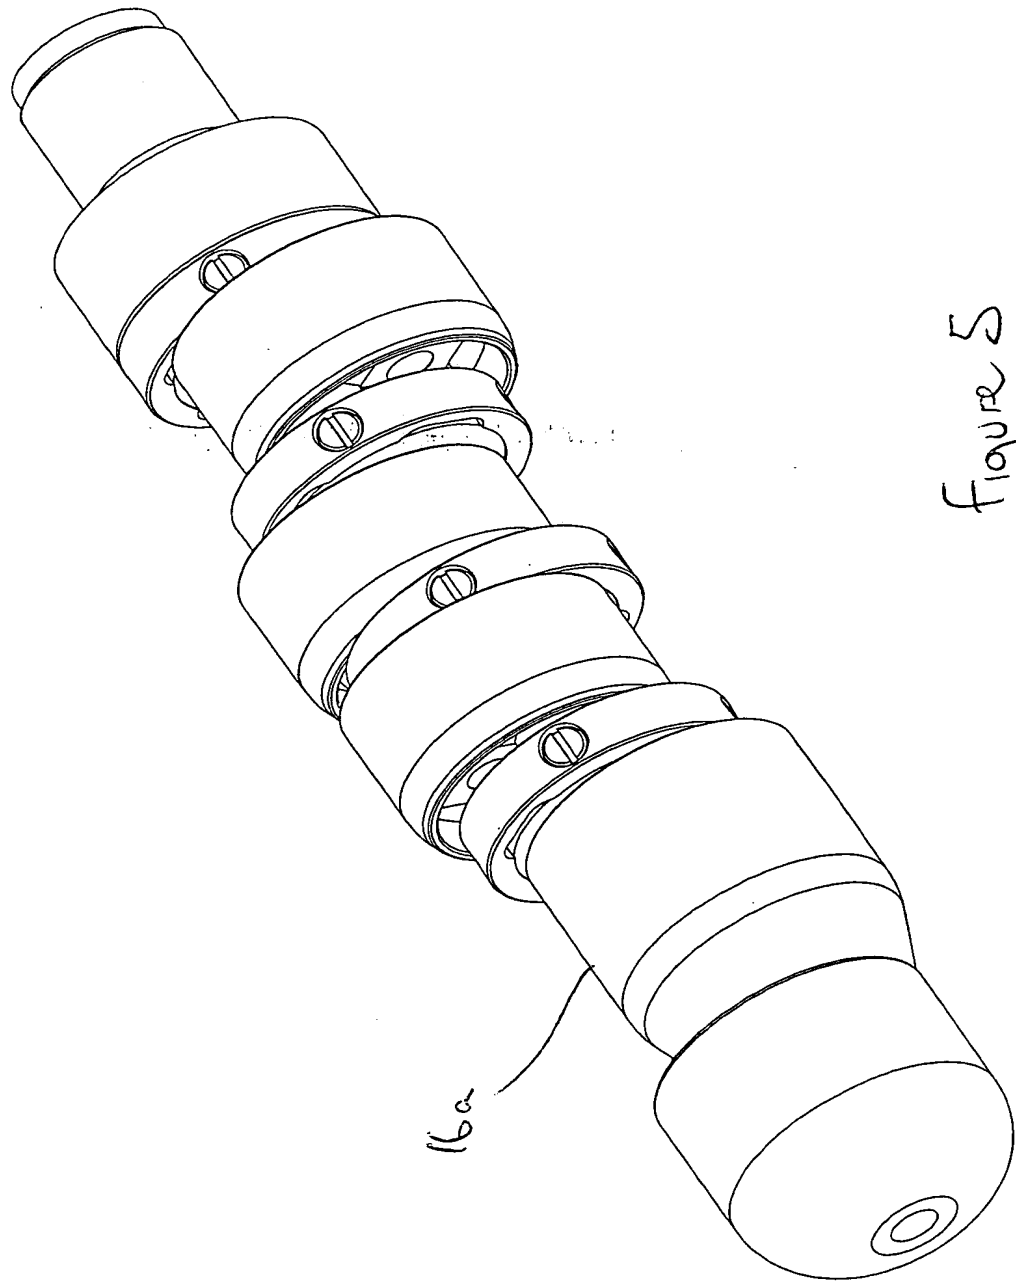


Figure 5

THIS PAGE BLANK (USPTO)

6/9

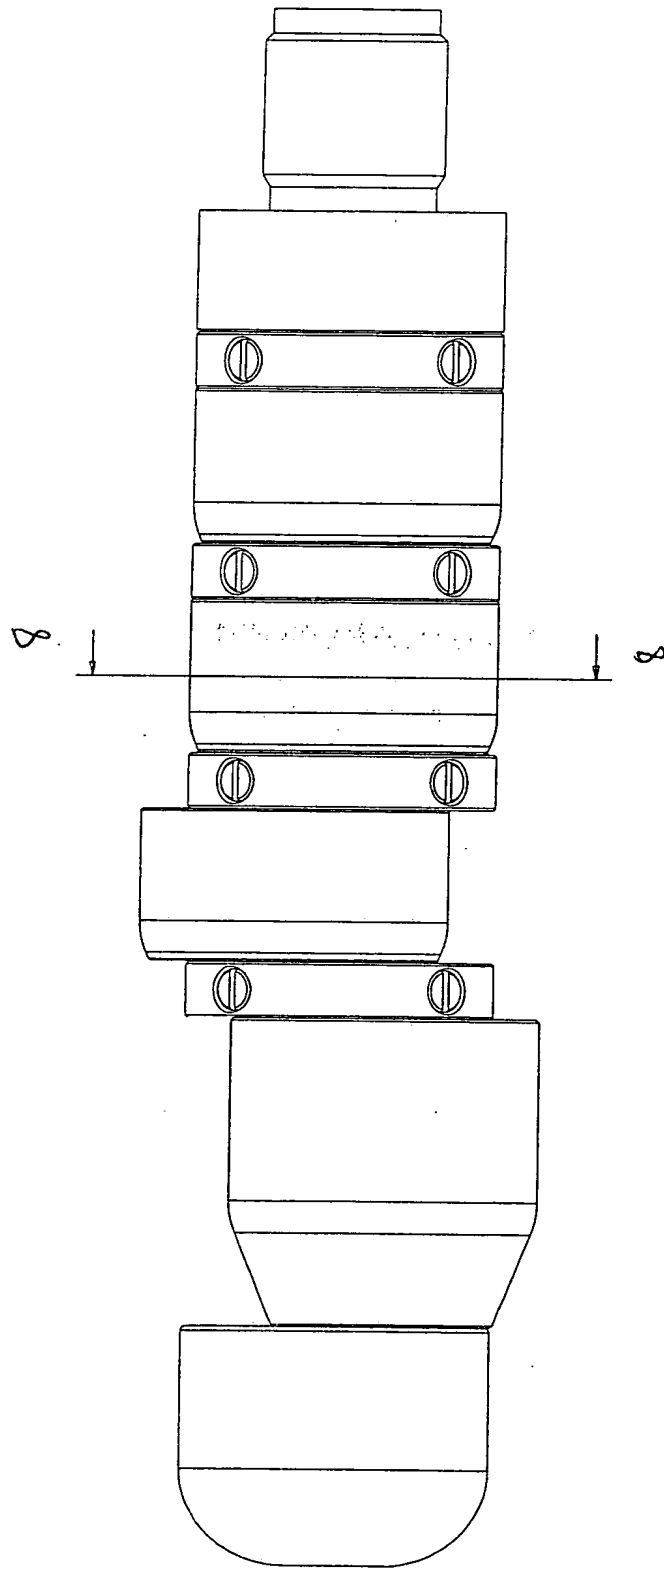


figure 6

THIS PAGE BLANK (USPTO)

7/9

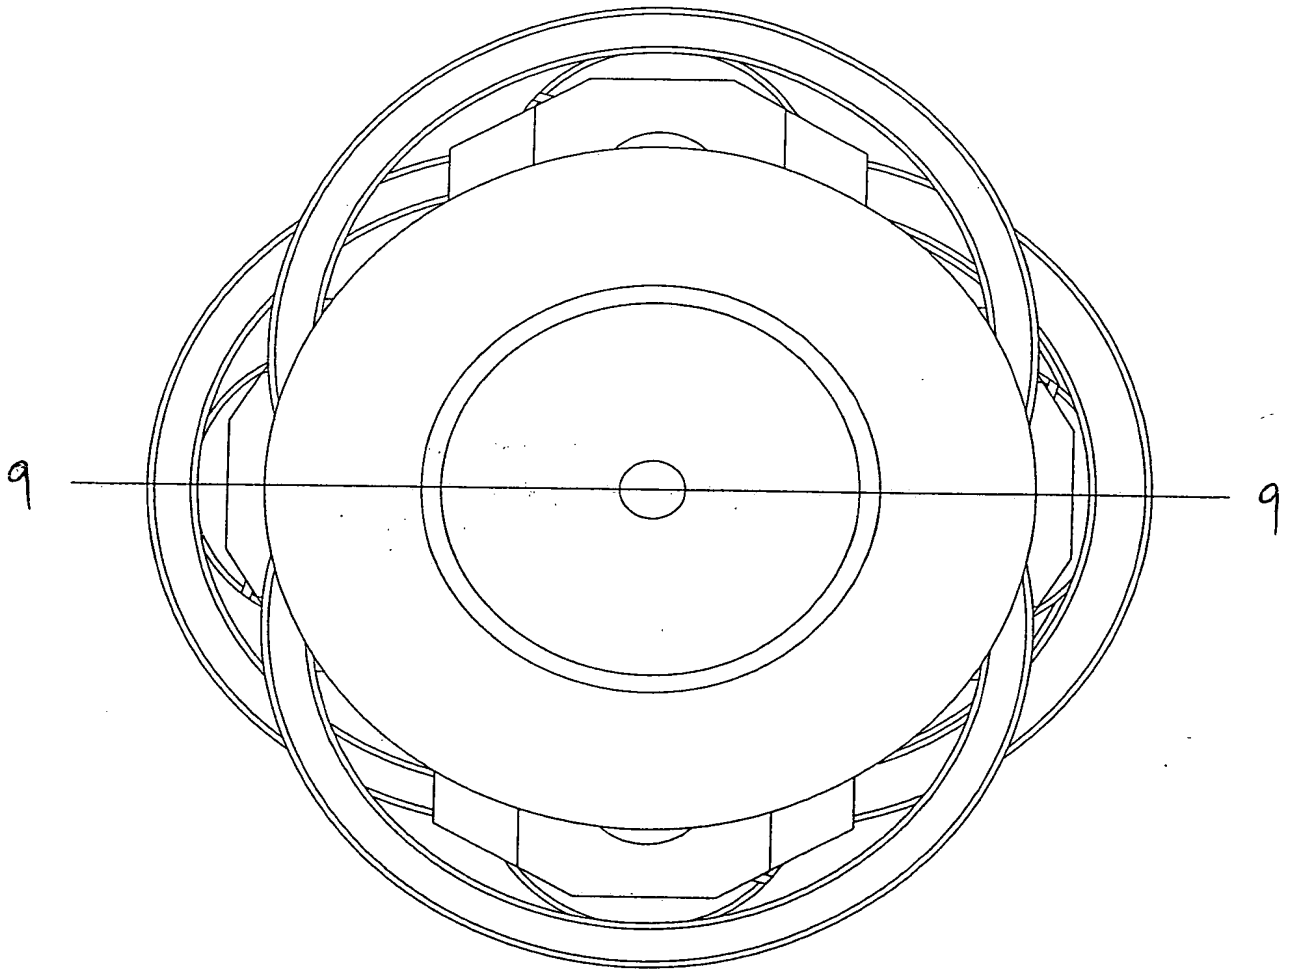


Figure 7

THIS PAGE BLANK (USPTO)

8/9

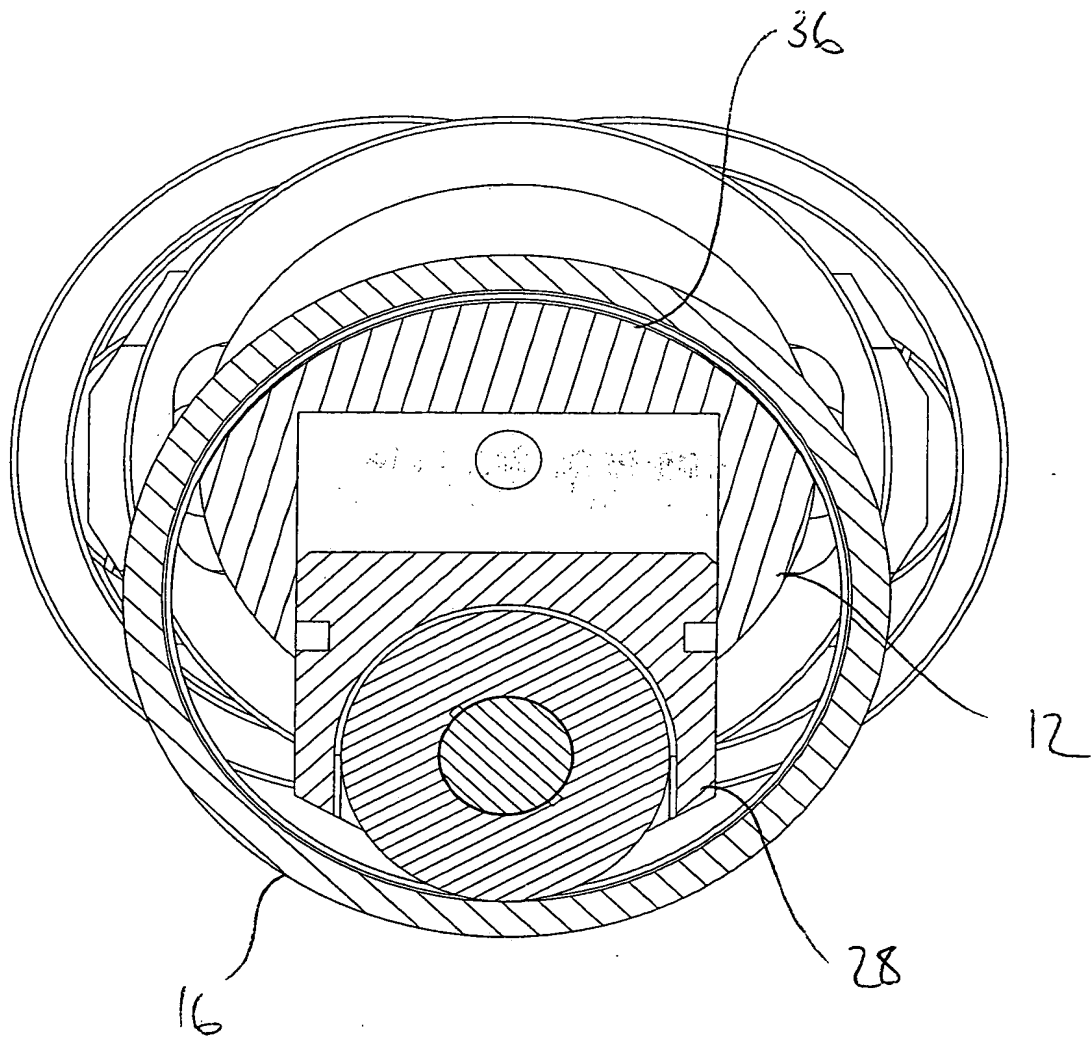


Figure 8

THIS PAGE BLANK (USPTO)

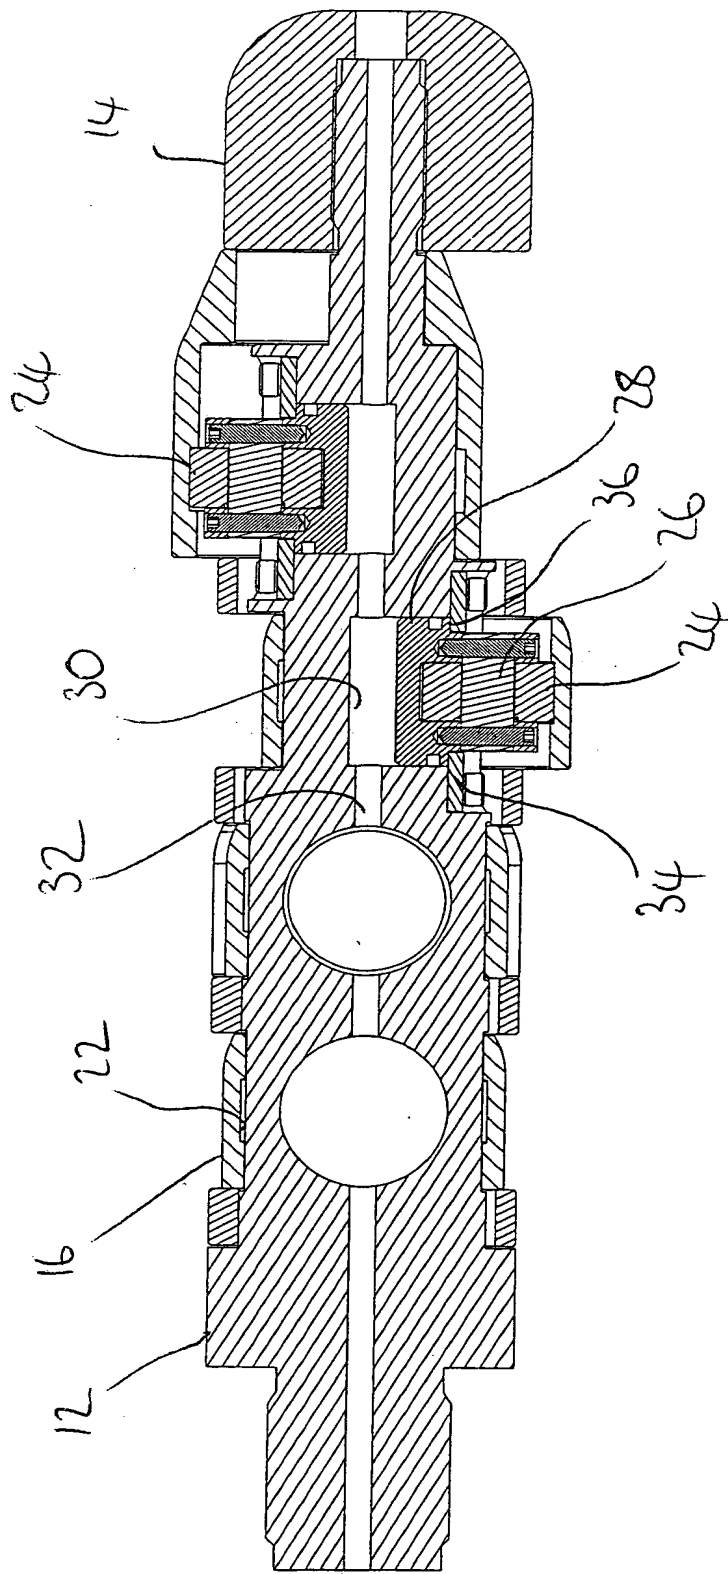


Figure 9

THIS PAGE BLANK (USPTO)